



Li-ion Button-Cell Battery

VER:

DATE:

Rechargeable 3.6V Li-ion Button Battery Specification

15mAh

Model: LIR1620

Prepared By/Date	Checked By/Date	Approved By/Date

Important Notice

These data sheets contain information specific to batteries manufactured at the time of its publication.

Content herein do not constitute a warranty.

Copyright @Xtra-Power Battery .All rights reserved



Li-ion Button-Cell Battery

VER:

DATE:

---CONTENTS---

1. SCOPE.....	Page3
2. BATTERY PACK SPECIFICATION.....	Page3
3. STANDARD TEST CONDITIONS.....	Page3
4. APPEARANCES	Page4
5. ELECTRICAL CHARACTERISTICS.....	Page4
6. TEMPERATURE ADAPTABILITY.....	Page5
7. DESTROY ADAPTABILITY.....	Page5
8. CAUTIONS IN USE.....	Page5
9. Dimension	Page6



Li-ion Button-Cell Battery

VER:

DATE:

1. SCOPE

This specification describes the related technical standard and requirements of the rechargeable Li-ion battery pack supplied by Xtra-Power Battery.

Battery produced with the [LIR1620](#) cell will meet the specification.

2. BATTERY SPECIFICATION

ITEMS	SPECIFICATION		REMARK
Model	LIR 1620		
Constant Voltage	3.6V		
Capability	Typical	18mAh	@0.2C Discharge
	Minimum	15mAh	
Dimensions	Φ 16.0 (+0.3)*2.0 (+0.3)mm		Bare cell
Weight	1.4 (±0.2)g		

3. STANDARD TESTING CONDITIONS (No Load)

ITEMS		REGISTER
Standard charge		CC/CV model, constant voltage 4.2V, constant current 0.2C, end current 0.01C
General charge.		CC/CV model, constant voltage 4.2V, constant current 0.5C, end current 0.01C
Apacer charge		CC/CV model, constant voltage 4.2V, constant current 1C, end current 0.01C
Standard discharge		Constant current 0.2C, end voltage 2.75V
General discharge		Constant current 0.5C, end voltage 2.75V
Apacer discharge		Constant current 1C, end voltage 2.75V
Environment temperature	Charge	0 -- +45℃
	Discharge	-20℃ -- +60℃
	Storage temperature	One month -20℃ -- +55℃
		Three months -20℃ -- +45℃
		One year -5℃ -- +30℃
	General temperature	20℃ ± 5℃
	Atmospheric pressure	86 -- 106Kpa
	Relative humidity	45% -- 85%

		VER:
	Li-ion Button-Cell Battery	DATE:

4. APPEARANCES

ITEMS	TEST CONDITION	REQUIRE
APPEARANCE	Under light lamp 40W	Shall be free noticeable flaws breaks, age, Discoloration, deformation, uneven, and other Defects which impair the value of the commodity

5. ELECTRICAL CHARACTERISTICS

ITEMS	TEST CONDITION	REQUIRE
Complete Charge	The battery is charged with constant current 0.2CmA and constant voltage 4.2v until the charging current is less than 0.01CmA. The longest charging time is less than 8 hours.	
Initial capacity	The capacity measured after the battery is discharged with constant current 0.2C until the voltage reaches 2.75V cut-off in one hour after complete charge.	18mAh
Cycle life	The capacity measured after 500 cycles of complete charge and discharge at 0.2C current to 2.75V cut-off.	Capacity more than 70% of Initial capacity
Impedance	Internal resistance measured at 1KHz after complete charge.	$\leq 2000m\ \Omega$

6. TEMPERATURE ADAPABILITY

ITEMS	TEST CONDITION	REQUIRE
High temperature discharge	After complete charge, at 60°C , discharging current 0.2C to 2.75V-END discharge.	No explosion, fire, or smoke. Discharge efficiency $\geq 85\%$.
High temperature exposure	After relative charge, all batteries being tested are stored in chamber of 150 °C for 10 min. After taking the batteries out of the chamber, all the batteries are visually examined.	No explosion, fire, or smoke.
Low temperature discharge	After complete charge. At -20°C, discharging current 0.2CmA to 2.75V-END discharge.	No explosion, fire, or smoke. Discharge efficiency $\geq 80\%$.

7. DESTROY ADAPTABILITY

ITEMS	TEST CONDITION	REQUIRE
Vibration Test	Subject to 1 hour 10-55Hz 3.5mm amplitude Vibration for any direction at shipment (complete packing) state. Then test discharge and rated charge at $25\pm 2^{\circ}\text{C}$.	No explosion, fire or Smoke. No leakage or damage
Drop Test	Drop test battery 1.2m above steel board of more than 10mm thickness. One time drop each for 6 surface, 4 ride direction of a battery pack	No leakage or damage No explosion, fire or Smoke. Discharge time Less than 50 minute.

8. CAUTIONS IN USE

To ensure proper use of the battery please read the manual carefully before using it.

. Handling

- Do not expose to, dispose of the battery in fire.
- Do not put the battery in a charger or equipment with wrong terminals connected.
- Avoid shorting the battery
- Avoid excessive physical shock or vibration.
- Do not disassemble or deform the battery.
- Do not immerse in water.
- Do not use the battery mixed with other different make, type, or model batteries.
- Keep out of the reach of children.

. charge and discharge

- Battery must be charged in appropriate charger only.
- Never use a modified or damaged charger.
- Do not leave battery in charger over 24 hours.

. storage

- Store the battery in a cool, dry and well-ventilated area.

. disposal

- Regulations vary for different countries. Dispose of in accordance with local regulations.

Li-ion Button-Cell Battery

VER:


DATE:

Edition NO.

Date

Sign

Checked

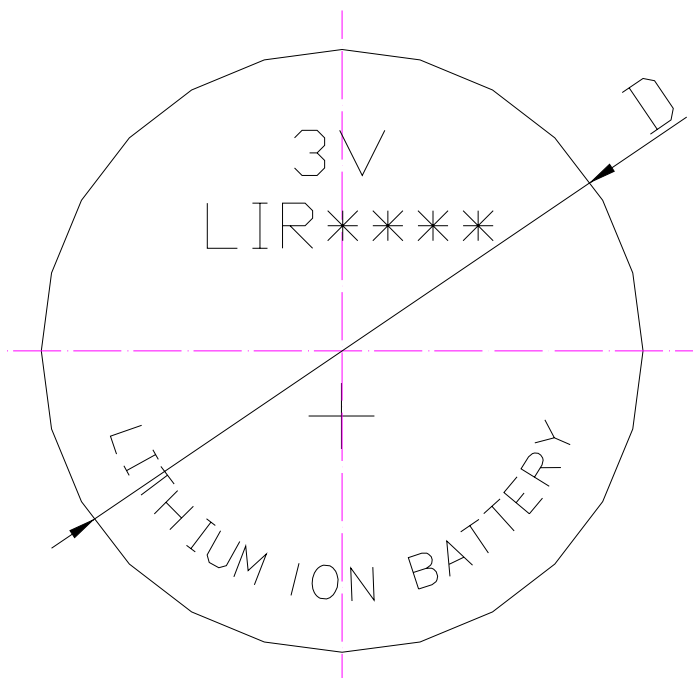

D	16.0+0.3	T	2.0+0.3	UNIT	mm
Drawer		Checked		Approved	Date
Xtra-power				LIR 1620 DRAWING	
				Drawing ID	