


Lithium-ion Prismatic Rechargeable Battery

423048A


Specification

Nominal Voltage:		3.7V	
Capacity¹ (mAh)	0.2C Discharge		
	Minimum²	680	
	Typical³	700	
Dimensions	Thickness	4.4mm⁰_{-0.3}	
	Width	30.0mm⁰_{-0.5}	
	Height	50.0mm⁰_{-0.5}	
Weight		15.5g	
Internal Impedence		< 60mΩ (After charge)	
Charge	Standard	350mA (0.5C) X 5 hrs	
	Rapid	700mA (1C) X 2.5 hrs	
		°C	°F
Ambient Temperature	Charge	0~45°C	32~113°F
	Discharge	-20~60°C	-4~140°F
	Storage	-20~45°C	-4~113°F


Discharge characteristics at various temperature

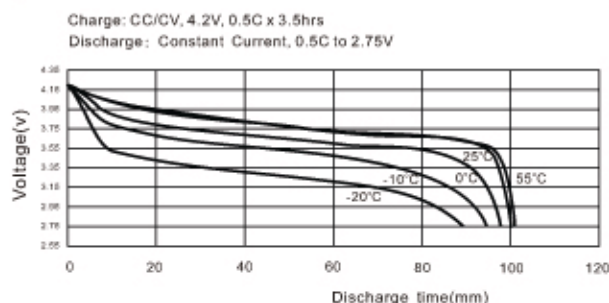


Cycle life characteristics

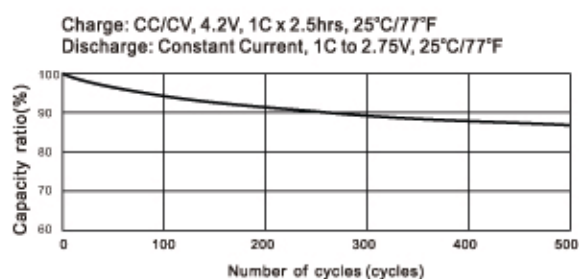

Discharge characteristics at various current

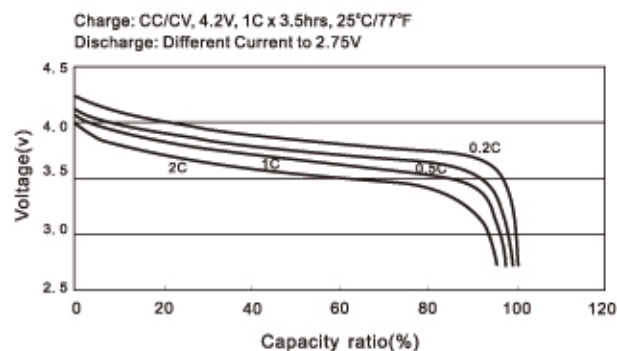

Dimensions(Bare cell) (mm)

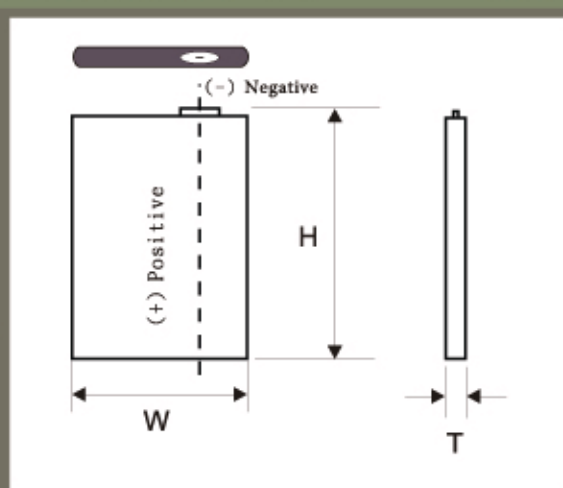

Note:

1. After charging at 1C for 2.5 hours.
2. Nominal capacity, rated at 0.2C, 25°C/77°F.
3. Average capacity.

Charge characteristics

