

Xtra-Power- Li-ion Battery Individual Data Sheets

1. Preface

The purpose of this product specification is to provide technical information for the rechargeable Lithium-ion cylindrical battery ICR14500UL, manufactured and supplied by Xtra-power .

2. Description and Model

2.1 Description	Rechargeable Lithium-ion cylindrical battery
2.2 Model	ICR14500UL

3. Specification

3.1 Capacity	Nominal	750mAh
	Typical	800mAh
3.2 Charging Voltage		4.20V
3.3 Nominal Voltage		3.7V at 0.2C ₅ mA
3.4 Standard Charging Method		Constant current:375mA Constant voltage 4.20V
3.5 Cut-off Discharge Voltage		3.00V
3.6 Max.Discharge Current		1125mA
3.7 Max.Charge Current		750mA
3.8 Cycle Life		>500 cycles at 0.5C mA discharge
3.9 Ambient Temperature		
	for Standard Charge	0°C ~ 45°C
	for Discharge	-20°C ~ 60°C
3.10 Storage		
	for within the temperature	-20°C ~ 60°C
	for within the humidity	Smaller or equal to 75%
3.11 Energy Density		
	Wh/L	~360
	Wh/Kg	~135
3.12 Weight of Bare Cell		~20g
3.13 Charge State Internal Impedance		<80mΩ

4. Appearance

Appearance shall be free from any remarkable scratch,flaws, rust, discoloration or electrolyte leakage(visible or by smell)

5. Standard Test condition

5.1 Environment Conditions

Unless otherwise specified,all test stated in this Product Specification are conducted within the temperature 15~25°C and the humidity 45~85%RH.

Xtra-Power-Li-ion Battery Individual Data Sheets

5.2 Test Equipment

(1) Impedance meter

The impedance meter with AC 1kHz should be used

6. Test Procedure and Its Standard

Item	Measuring Procedure	Standard
6.1 Appearance	Visual	No Defect and Leak
6.2 Dimension	Caliper	As item 8
6.3 Weight	Scale	As item 3.12
6.4 Maximum Charge Current	CCCV(Constant Current Constant Voltage)	750 mA
6.5 Full charge	CCCV	CC-0.5C ₅ mA CV- 4.2V End-Current 7mA
6.6 Open Circuit Voltage	Within 1hr after full charge,measure Open circuit voltage	>4.10V
6.7 Internal Impedance	Measure the battery with 1kHz AC	<80mΩ
6.8 Discharge Capacity	Within 1hr after full charge,discharge until final discharge,at 0.2C mA and measure the capacity	>750mAh
6.9 Maximum Discharge Current	Until final discharge voltage	1125 mA
6.10 Charge/Discharge Cycle Life	Charge:CCCV,CC- 0.5CmA,CV- 4.2V End-Current 6mA Discharge:0.5CmA to 3.00V,This charge/discharge shall be repeated 500 times	Discharge capacity should be >70% of item 6.8
6.11 Leakage Proof	After full charging,the battery shall be stored at 40±2°C and humidity 80±5%for 21 days	No leakage should be observed by visual inspection
6.12 Temperature Characteristics	1)After full charge at 20±5°C ,stand at -20±2°C for 18h,then discharge at 0.2C mA and measure the capacity 2)After full charge at 20±5°C ,stand at 55±2°C for 2hrs ,then discharge at 1C ₅ mA and measure the capacity	Discharge capacity should be>60% of item 6.8 and no abnormality on its appearance and stucture
6.13 Charge Retension	After full charging,stand at 20±5°C for 28 days,measure the discharge capacity according to item 6.8	Discharge capacity should be>85% of item 6.8

Xtra-Power-Li-ion Battery Individual Data Sheets


Charge/Discharge Characteristics

Charge :CC/CC4.2V, 350mA(0.5C),

End Current 7mA

Discharge: 350mA(0.5C) Cute-off at 3.00V

Temperature :25°C

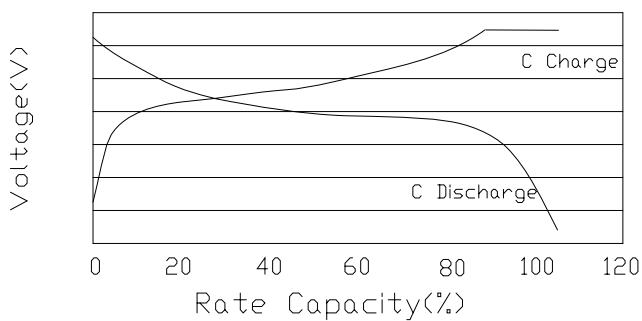


Temperature Characteristics

Charge :CC/CV 4.2V, 0.5CA

End Current 7mA

Discharge: 0.5CA Cute-off at 3.00V

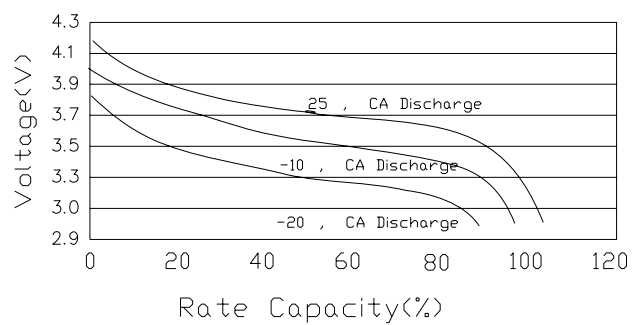


Charge/Discharge Cycle Life

Charge : CC/CV 4.2 V, 0.5CA,End Current 7mA

Discharge :0.5CA,Cute-off at 3.00V

Temperature :25°C

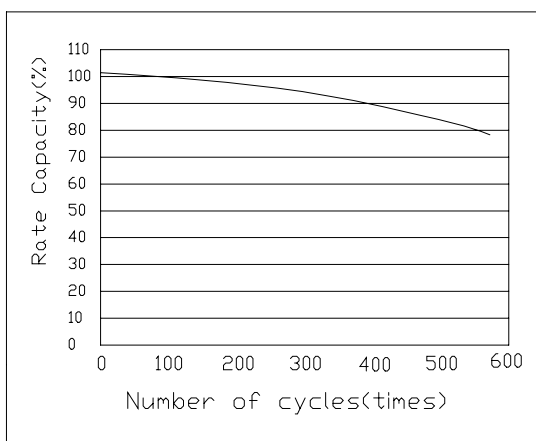

8.Dimension (Bare Cell) mm

