



Zinc-Silver Oxide/Manganese Dioxide Battery

VER:

DATE:

1.5V

Zinc-Silver Oxide/ Manganese Coin type Battery

Specification

32mAh

Model: SR69

Prepared By/Date	Checked By/Date	Approved By/Date

Important Notice

These data sheets contain information specific to batteries manufactured at the time of its publication.

Content herein do not constitute a warranty.

Copyright @ Xtra-Power battery .All rights reserved



Zinc-Silver Oxide/Manganese Dioxide Battery

VER:

DATE:

PRODUCT SPECIFICATION

1. Applicability: This specification is applicable to **SR69** coin type zinc-silver oxide/manganese dioxide battery.

SPECIFICATION

1. Cross Reference :

			U.S.A		H.K
IEC	JAPAN	Ray-O-Vac	SWITZERLAND	GERMANY	PRODUCTS
SR69	SR920W	RW415	370	V371	SG6

2. Chemical System : Zinc-Silver Oxide/ Manganese Dioxide (Potassium Hydroxide Electrolyte)


3. Nominal Voltage : 1.55V

4. Standard Capacity : 32mAh (continuously discharge at $20\pm 2^{\circ}\text{C}$ under $22\text{k}\Omega$ load to 0.9V end-point voltage)


5. Approximate Weight : 0.57g

6. Dimensions & Structure : Dimensions & structure of the cell are shown in the attached Fig. 1.

7. Terminal Materials :
Negative : Ni plated/Fe/Cu plated or gold plated steel
Positive : Ni plated steel

		VER:	
	Zinc-Silver Oxide/Manganese Dioxide Battery	DATE:	
8. Characteristics : Characteristics of the cell are shown in the following table.			
Items	Storage	Characteristics Conditions	
8.1 Electric Characteristics			
Open-Circuit Voltage	Initial	1.560V or higher	DC Voltmeter: The tolerance is ±0.005V and the input resistance is 1M Ω or more.
	After 12 months	1.550V or higher	
Closed-Circuit Voltage	Initial	1.550V or higher	DC Voltmeter : Same as above. Load Resistance : 22k Ω , 0.8Sec.
	After 12 months	1.540V or higher	
8.2 Service Output			
Service Life 22k Ω Continuous Discharge	Initial	600hrs or longer	Discharge Resistance : 22k Ω End-Point Voltage : 0.9V
	After 12 months	540hrs or longer	
8.3 Electrolyte Leakage Proof Characteristics			
Electrolyte leakage on overdischarge	There are no bulging or deformation of cells in excess of maximum dimensions shown in attached Fig. 1 by 0.2mm or more. There are no visible electrolyte leakage.		Temperature : 20±2°C Humidity : (65±20)%RH Load Resistance : 22k Ω Overdischarge Time : 48hrs (discharge after having reached specified end-point voltage)

9. Discharge Curve :

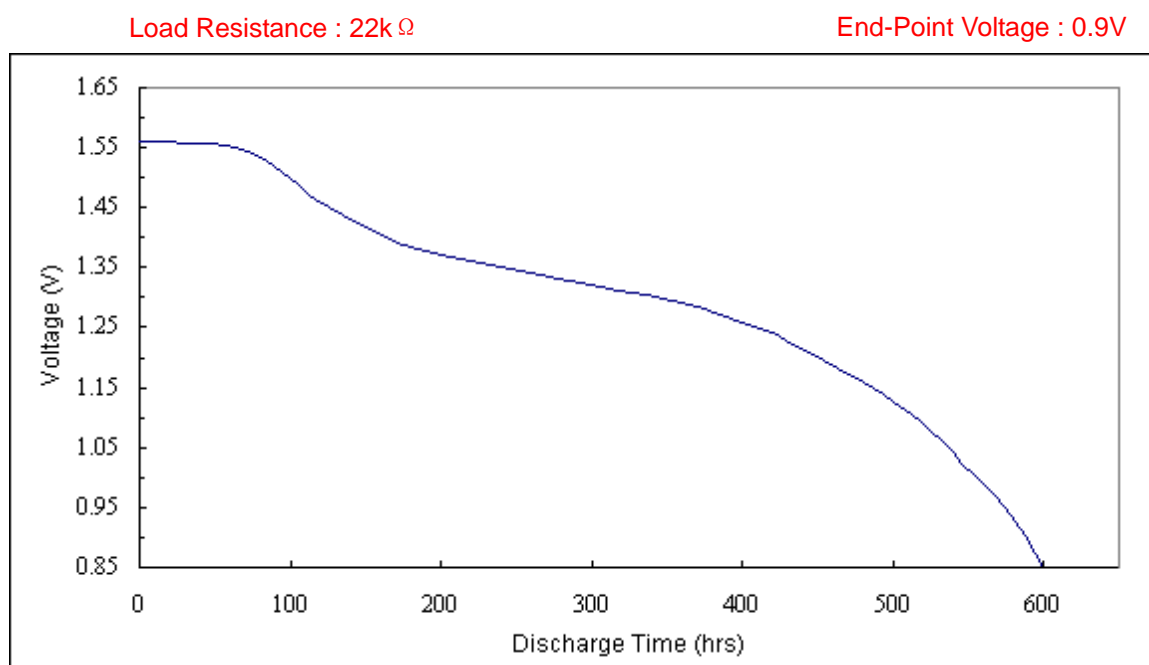

10. Markings on Product :

- (1) Battery Type : SR921
- (2) Brand :
- (3) Polarity : "+" at the bottom ("--" not indicated)
- (4) Other specified markings

11. Caution for Use :


- (1) Since the button cell is not manufactured for recharging, there are risks of electrolyte leakage or causing damage to the device if the cell is charged.
- (2) The button cell shall be installed with its "+" and "--" sign according to the instruction shown on the applied device.
- (3) Short-circuiting, heating, disposing of in fire, or disassembling the button cell shall be prohibited.

12. Warranty :

12 months shelf life after delivery.

SR921 DIMENSIONS & STRUCTURE

Dimensions (in mm) :

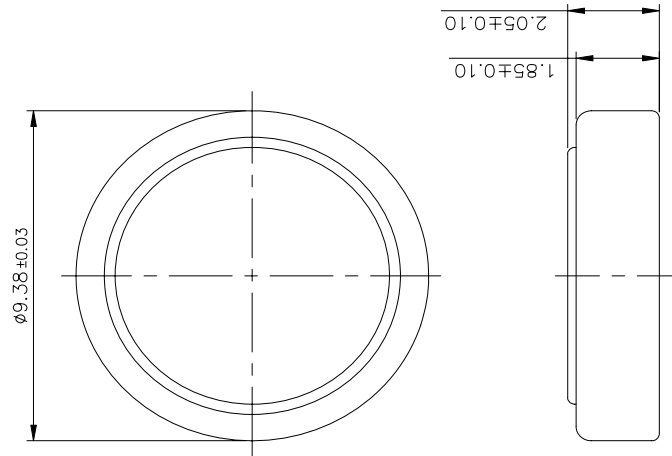

Structure :

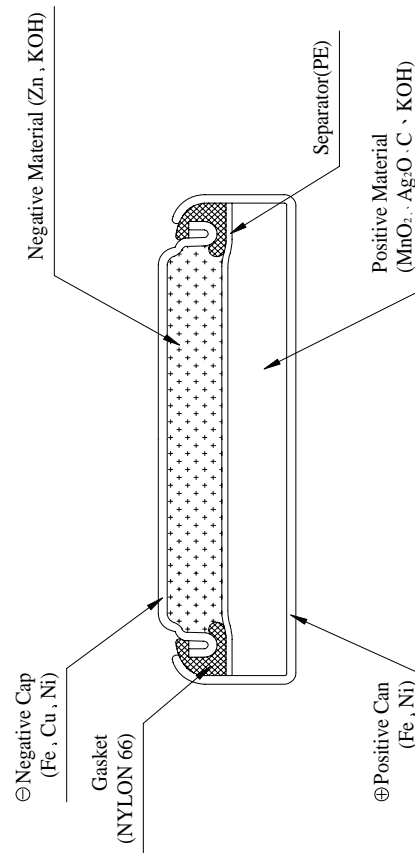


Fig. 1