



# Lithium/Iron Disulfide

VER:

DATE:

1.5 V

## Lithium/Iron Disulfide Battery

### Specification

**Model: [LFB AAA](#)**

Prepared By/Date	Checked By/Date	Approved By/Date

#### Important Notice

These data sheets contain information specific to batteries manufactured at the time of its publication.

Content herein do not constitute a warranty.

Copyright @ Xtra-Power Battery .All rights reserved



# Lithium/Iron Disulfide

VER:

DATE:

## 1. Preface

The purpose of this product specification is to provide technical information for the Lithium/Iron Disulfide (Li/FeS<sub>2</sub>) Lithium battery LFB AAA, manufactured and supplied by Xtra-Power Battery.

## 2. Description and Model

2.1 Description: Lithium/Iron Disulfide (Li/FeS<sub>2</sub>)

2.2 Model : LFB AAA

## 3. Specification

3.1 Rated Capacity: 1000mAh discharging at 350mA current

3.2 Average Weight: 7.7g

3.3 Nominal Voltage: 1.5 V

3.4 Work Voltage: 1.3V discharging at 100mA current

3.5 Cut-off Discharge Voltage: 0.80V

3.6 Max. Discharge Current: 1000mA

3.7 Volume: 3.8cubic centimeters (0.2 cubic inch)

3.8 Lithium Content: Less than 0.5 gram (0.02 oz.) per cell

3.9 Ambient Temperature: for Discharge -20°C~45°C

3.10 Storage

for within the temperature: -20°C~45°C

for within the humidity : ≤ 75%

3.11 Shell Life: 5years

## 4. Appearance

Appearance should be free from any remarkable scratch, flaws, rust, discoloration or electrolyte leakage (visible or by smell)

## 5. Standard Test condition

### 5.1 Environment Conditions

Unless otherwise specified, all test stated in this Product Specification are conducted within the temperature 15~25°C and the humidity 45~85%RH


### 5.2 Test Equipment

Impedance meter: The impedance meter with AC 1kHz should be used

## 6. Test Procedure and Its Standard

Item	Measuring Procedure	Standard
6.1 Appearance	Visual	No Defect and No Leak
6.2 Dimension	Caliper	As item 8
6.3 Weight	Scale	As item 3.12
6.4 Max. Discharge Current	Until final discharge voltage	1000mA
6.5 Open Circuit Voltage	Measure open circuit voltage	1.70V ~ 1.90V
6.6 Internal Impedance	Measure the battery with 1kHz AC	
6.7 Discharge Capacity	The battery discharge until final discharge voltage 0.8V, at 350mA and measure the capacity	> 1100mAh
6.8 Leakage Proof	The battery should be stored at $40\pm 2^{\circ}\text{C}$ and humidity $80\pm 5\%$ for 21 days	No leakage should be observed by visual inspection

## 7. Discharging curve at 350mA and 100mA current to 0.80V

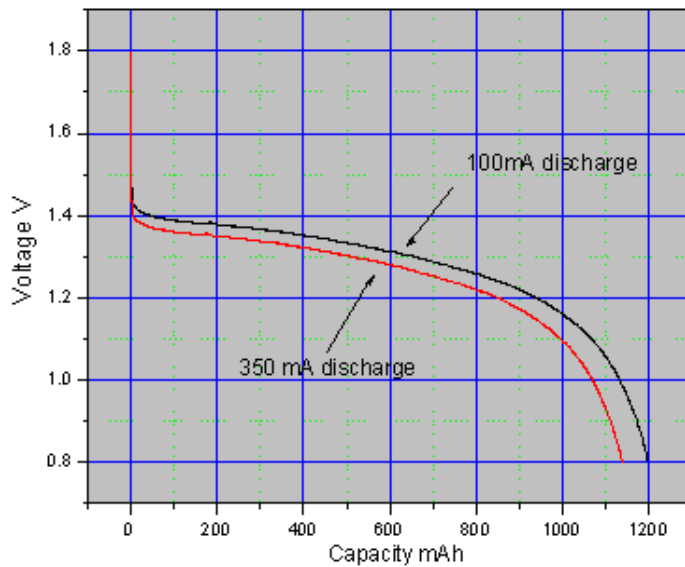

## 8. Dimension (Bare cell) mm

