
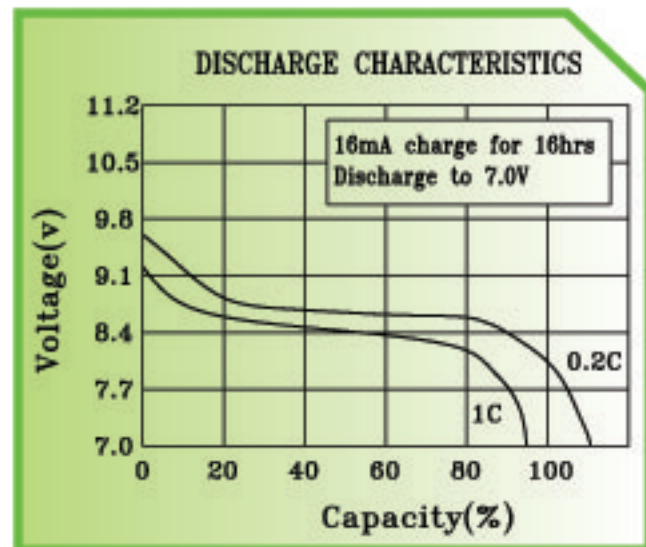


## Ni-MH rechargeable cylindrical battery pack ( Data Sheet )

### Specifications

Nominal Voltage		8.4V	
Dimensions	Long (mm)	26.5 <sup>+0</sup> <sub>-0.2</sub>	Weight Approx 42g
	Width(mm)	17.5 <sup>+0</sup> <sub>-0.2</sub>	
	Height(mm)	48.5 <sup>+0</sup> <sub>-0.2</sub>	
0.2C Discharge Capacity	Typical	170mAh	
	Minimum	160mAh	
Typical Internal Impedance		Less then 800mΩ	
Charge	Standard	16mA for 16hrs	
	Quit	32mA for 6~7hours	
Life expectancy		500 cycles	
Operating Temperature	Charge	Standard	0°c to 40°c
		Fast	10°c to 40°c
	Discharge		-10°c to 50°c
	Storage	<1 year	-10°c to 30°c
<3 months		-10°c to 40°c	

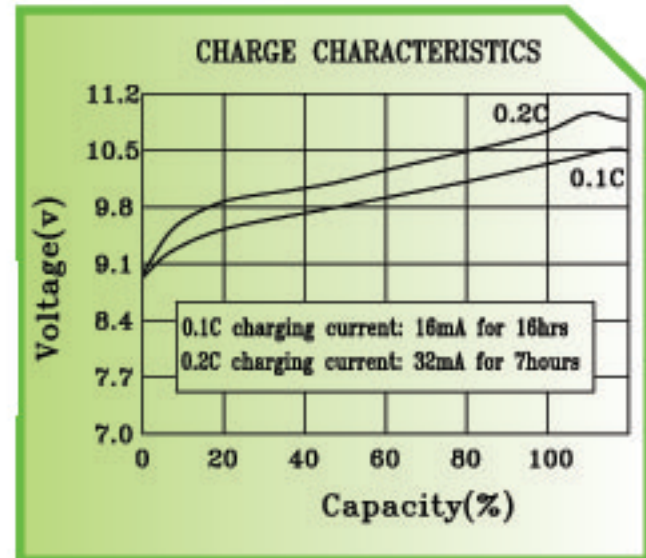

### (CELL DIMENSIONS)



1:1

