


Ni-MH rechargeable cylindrical battery pack (Data Sheet)

Specification

Nominal Voltage		1.2V	
Dimensions	Diameter	16.5±0.2mm	
	Height	66.5±0.3mm	
	Apx. Weight	48g	
0.2C Discharge Capacity	Typical	3850mAh	
	Minimum	3800mAh	
Typical Internal Impedance		Less than 15mΩ	
Charge	Standard	380mA for 16 hrs	
	Fast	1900mA for about 144min (-ΔV=5~10mV)	
Life expectancy		500 cycles	
Operating Temperature	Charge	Standard	0°c to 40°c
		Fast	10°c to 40°c
	Discharge		-10°c to 50°c
	Storage	< 1 year	-10°c to 30°c
		< 3 months	-10°c to 40°c


(CELL DIMENSIONS)

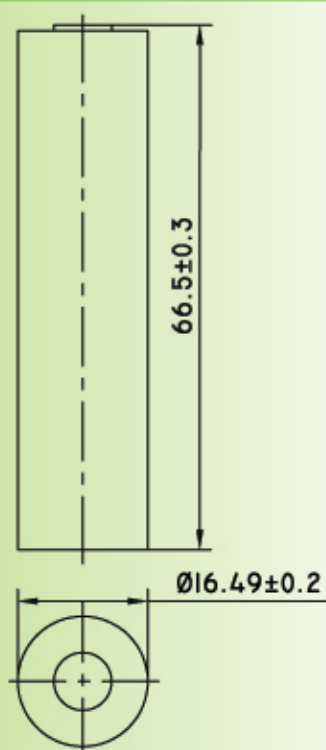


(With tube)

1:1

CHARGE CHARACTERISTICS

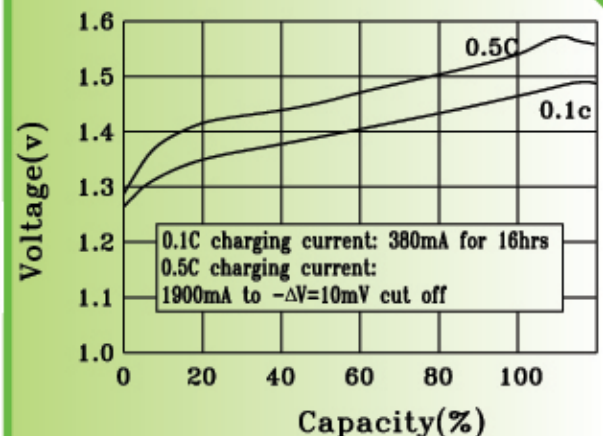

DISCHARGE CHARACTERISTICS

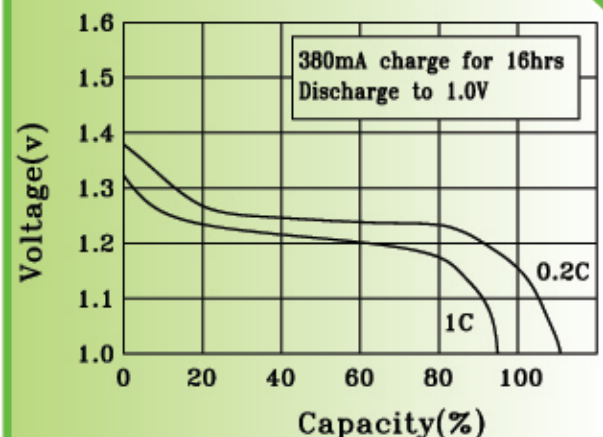

DISCHARGE CHARACTERISTICS AT DIFFERENT TEMPERATURE

