


Ni-MH rechargeable cylindrical battery pack (Data Sheet)


Specification

Nominal Voltage			1.2V
Dimensions	Diameter		16.5±0.2mm
	Height		50.0±0.3mm
	Apx. Weight		36g
0.2C Discharge Capacity	Typical		2150mAh
	Minimum		2100mAh
Typical Internal Impedance			Less than 15mΩ
Charge	Standard		210mA for 16 hrs
	Fast		2100mA for about 75min
Life expectancy			500 cycles
Operating Temperature	Charge	Standard	0°c to 40°c
		Fast	10°c to 40°c
	Discharge		-10°c to 50°c
	Storage	< 1 year	-10°c to 30°c
		< 3 months	-10°c to 40°c


CHARGE CHARACTERISTICS

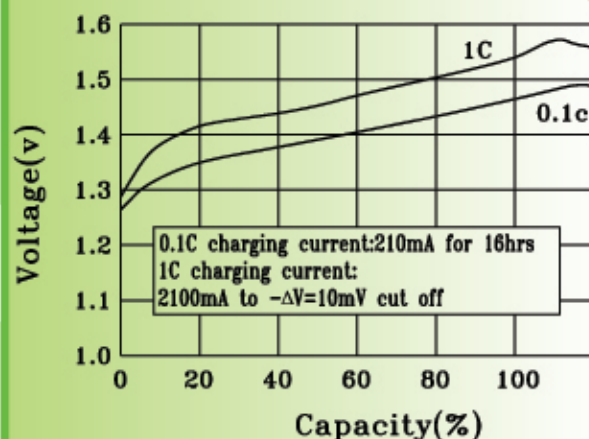


DISCHARGE CHARACTERISTICS

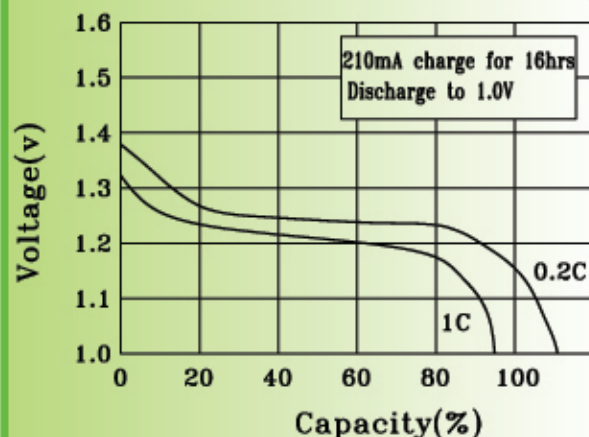

DISCHARGE CHARACTERISTICS AT DIFFERENT TEMPERATURE

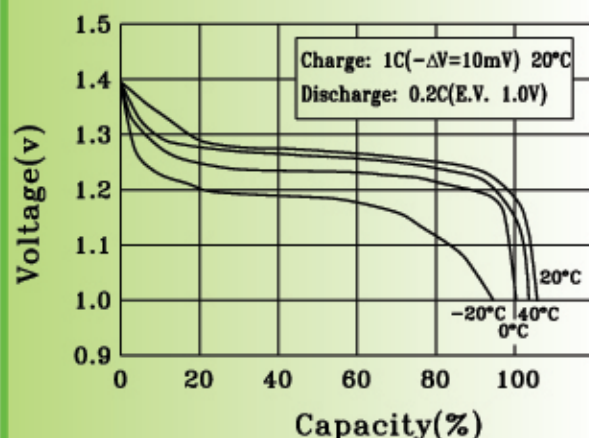

(CELL DIMENSIONS)

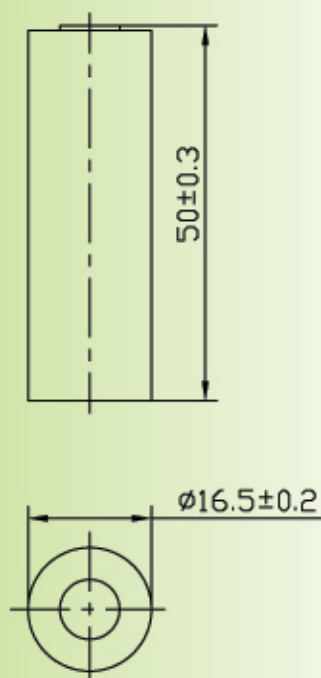

(With tube)

1:1