
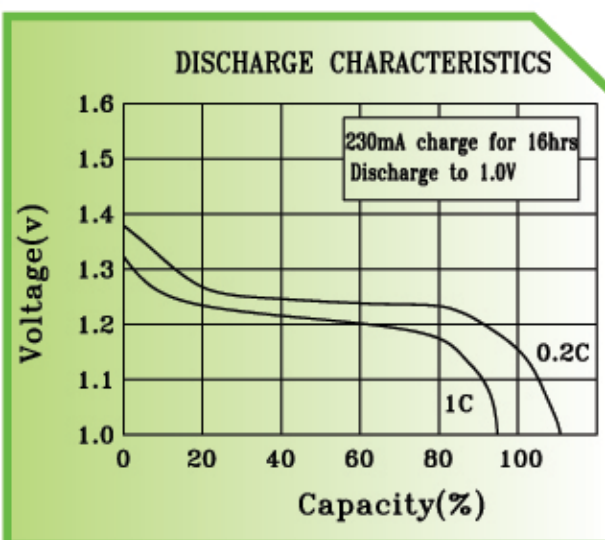



Ni-MH rechargeable cylindrical battery pack (Data Sheet)

Specification

Nominal Voltage			1.2V
Dimensions	Diameter		16.5±0.2mm
	Height		50.0±0.3mm
	Apx. Weight		38g
0.2C Discharge Capacity	Typical		2350mAh
	Minimum		2300mAh
Typical Internal Impedance			Less than 15mΩ
Charge	Standard		230mA for 16 hrs
	Fast		2300mA for about 75min
Life expectancy			500 cycles
Operating Temperature	Charge	Standard	0°c to 40°c
		Fast	10°c to 40°c
	Discharge		-10°c to 50°c
	Storage	< 1 year	-10°c to 30°c
		< 3 months	-10°c to 40°c

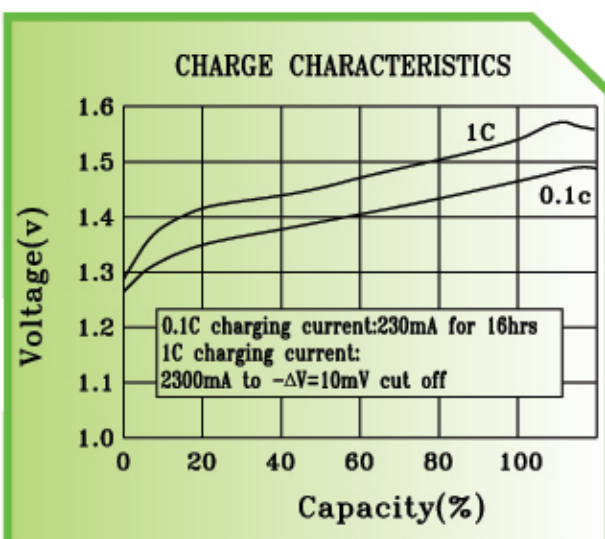

(CELL DIMENSIONS)

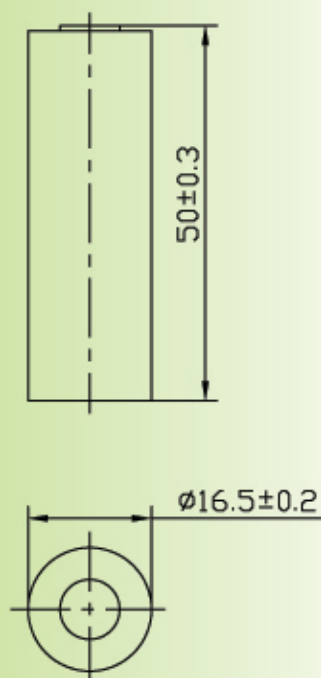

(With tube)

1:1

