
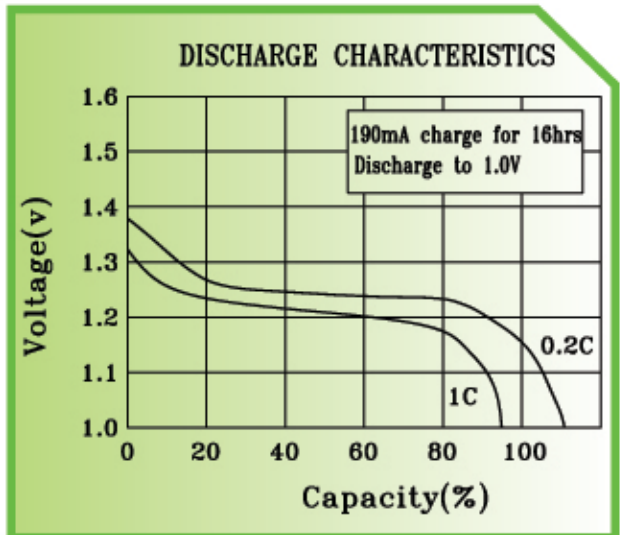



Ni-MH rechargeable cylindrical battery pack (Data Sheet)

Specification

Nominal Voltage			1.2V
Dimensions	Diameter		16.5±0.2mm
	Height		42.0±0.3mm
	Apx. Weight		33g
0.2C Discharge Capacity	Typical		1950mAh
	Minimum		1900mAh
Typical Internal Impedance			Less than 30mΩ
Charge	Standard		190mA for 16 hrs
	Fast		1900mA for about 75min
Life expectancy			500 cycles
Operating Temperature	Charge	Standard	0°c to 40°c
		Fast	10°c to 40°c
	Discharge		-10°c to 50°c
	Storage	< 1 year	-10°c to 30°c
		< 3 months	-10°c to 40°c

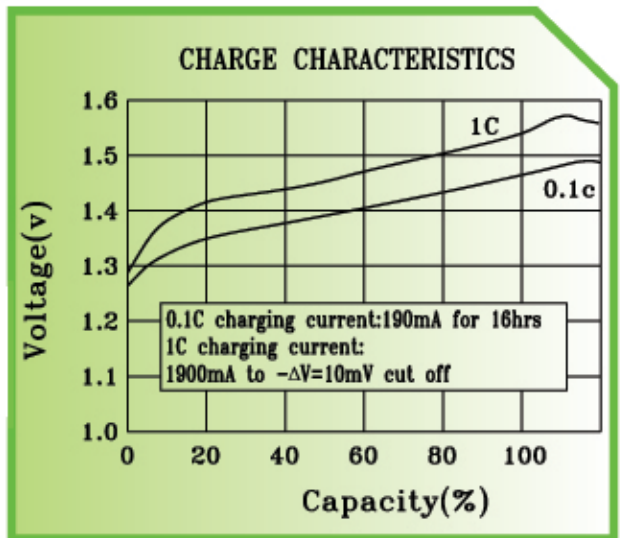

(CELL DIMENSIONS)

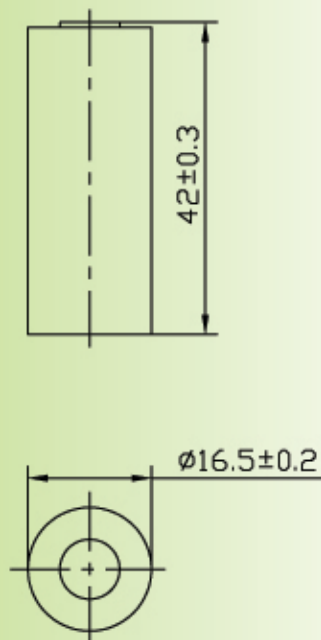

(With tube)

1:1

