


Ni-MH rechargeable cylindrical battery pack (Data Sheet)

Specification

Nominal Voltage		1.2V	
Dimensions	Diameter	13.9±0.2mm	
	Height	50.0±0.3mm	
	Apx. Weight	28g	
0.2C Discharge Capacity	Typical	1550mAh	
	Minimum	1500mAh	
Typical Internal Impedance		Less than 25mΩ	
Charge	Standard	150mA for 16hrs	
	Fast	1500mA for about 75min	
Life expectancy		500 cycles	
Operating Temperature	Charge	Standard	0°c to 40°c
		Fast	10°c to 40°c
	Discharge		-10°c to 50°c
	Storage	< 1 year	-10°c to 30°c
		< 3 months	-10°c to 40°c


(CELL DIMENSIONS)

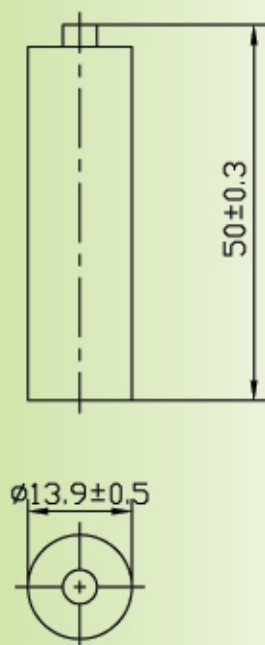


(Without tube)

1:1

CHARGE CHARACTERISTICS

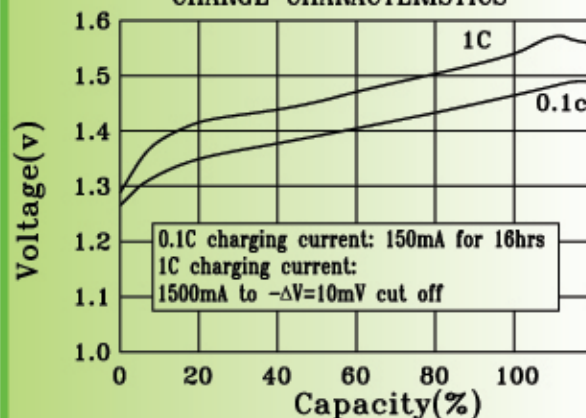

DISCHARGE CHARACTERISTICS

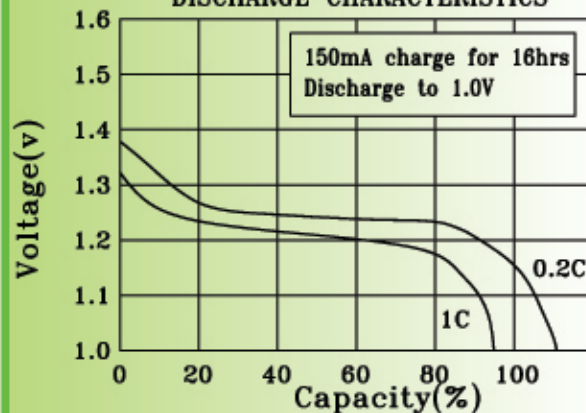

DISCHARGE CHARACTERISTICS AT DIFFERENT TEMPERATURE

