
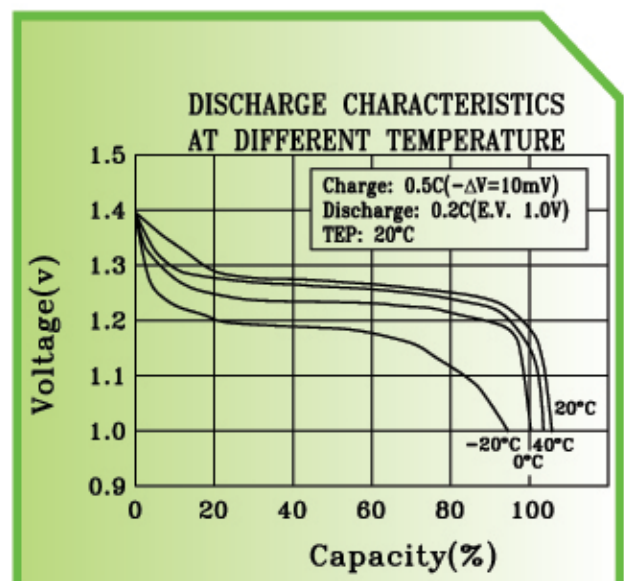
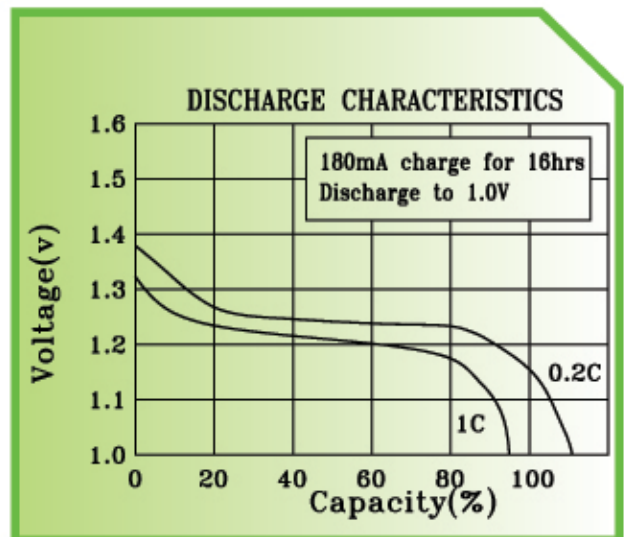



## Ni-MH rechargeable cylindrical battery pack ( Data Sheet )

### Specification

|                            |           |             |                        |
|----------------------------|-----------|-------------|------------------------|
| Nominal Voltage            |           |             | 1.2V                   |
| Dimensions                 |           | Diameter    | 14.0±0.2mm             |
|                            |           | Height      | 50.0±0.5mm             |
|                            |           | Apx. Weight | 29g                    |
| 0.2C Discharge Capacity    |           | Typical     | 1850mAh                |
|                            |           | Minimum     | 1800mAh                |
| Typical Internal Impedance |           |             | Less than 25mΩ         |
| Charge                     |           | Standard    | 180mA for 16hrs        |
|                            |           | Fast        | 900mA for about 150min |
| Life expectancy            |           |             | 500 cycles             |
| Operating Temperature      | Charge    | Standard    | 0°c to 40°c            |
|                            |           | Fast        | 10°c to 40°c           |
|                            | Discharge |             | -10°c to 50°c          |
|                            | Storage   | < 1 year    | -10°c to 30°c          |
|                            |           | < 3 months  | -10°c to 40°c          |

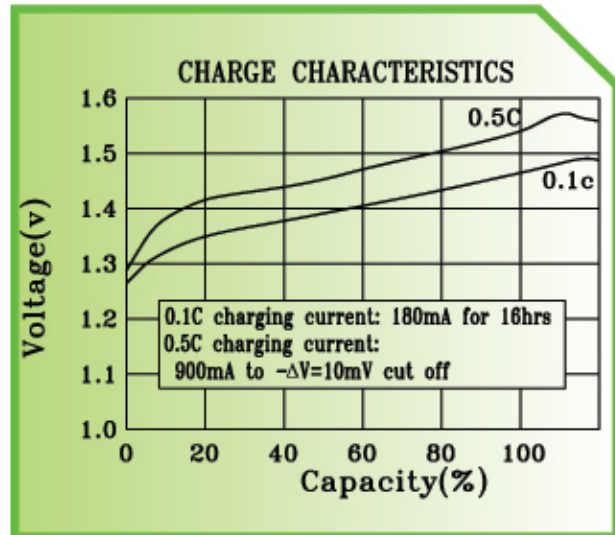

### (CELL DIMENSIONS)

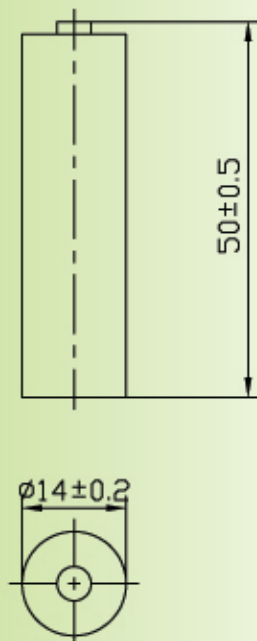

(Without tube)

1:1