
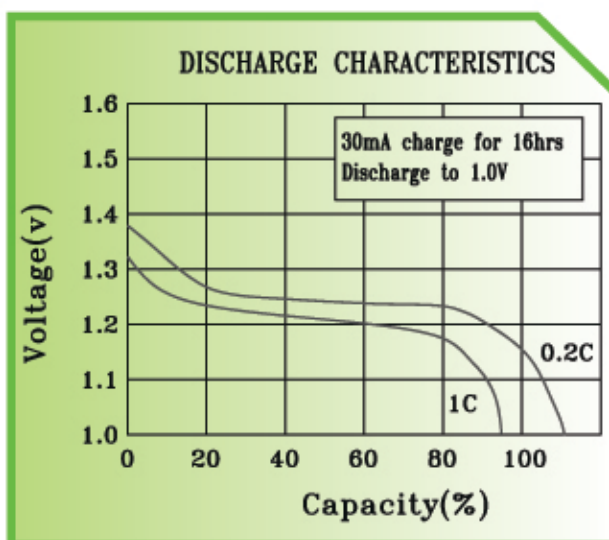



Ni-MH rechargeable cylindrical battery pack (Data Sheet)

Specification

| | | | |
|----------------------------|-------------|-----------------------|---------------|
| Nominal Voltage | | 1.2V | |
| Dimensions | Diameter | 10.0±0.2mm | |
| | Height | 28.4±0.3mm | |
| | Apx. Weight | 8g | |
| 0.2C Discharge Capacity | Typical | 320mAh | |
| | Minimum | 300mAh | |
| Typical Internal Impedance | | Less than 35mΩ | |
| Charge | Standard | 30mA for 16hrs | |
| | Fast | 300mA for about 75min | |
| Life expectancy | | 500 cycles | |
| Operating Temperature | Charge | Standard | 0°c to 40°c |
| | | Fast | 10°c to 40°c |
| | Discharge | | -10°c to 50°c |
| | Storage | < 1 year | -10°c to 30°c |
| | | < 3 months | -10°c to 40°c |

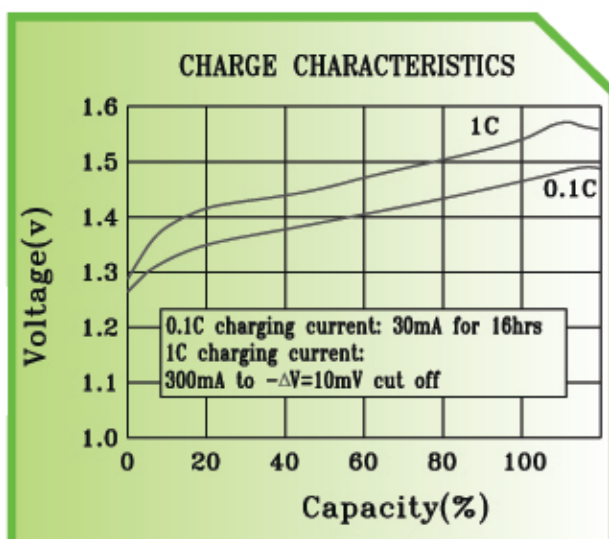

(CELL DIMENSIONS)

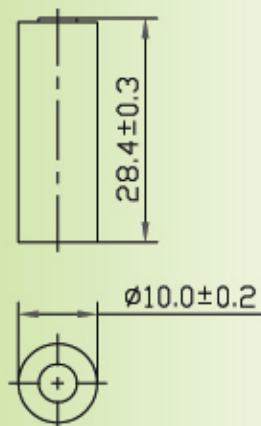

(With tube)

