


Ni-MH rechargeable cylindrical battery pack (Data Sheet)


Specification

Nominal Voltage			1.2V
Dimensions		Diameter	10.0±0.2mm
		Height	44.1±0.3mm
		Apx. Weight	13g
0.2C Discharge Capacity		Typical	750mAh
		Minimum	700mAh
Typical Internal Impedance			Less than 30mΩ
Charge		Standard	80mA for 16hrs
		Fast	400mA for about 150min
Life expectancy			500 cycles
Operating Temperature	Charge	Standard	0°c to 40°c
		Fast	10°c to 40°c
	Discharge		-10°c to 50°c
	Storage	< 1 year	-10°c to 30°c
		< 3 months	-10°c to 40°c


CHARGE CHARACTERISTICS

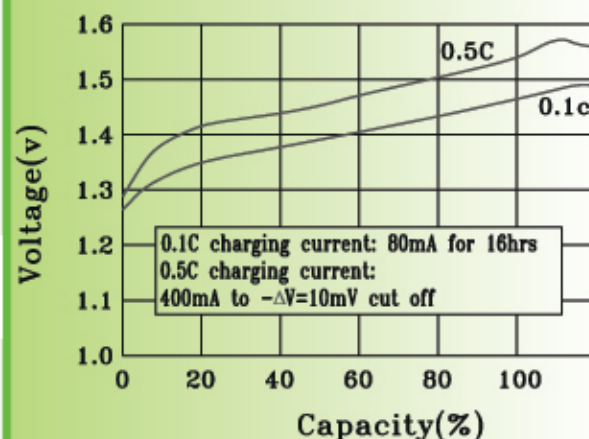

DISCHARGE CHARACTERISTICS

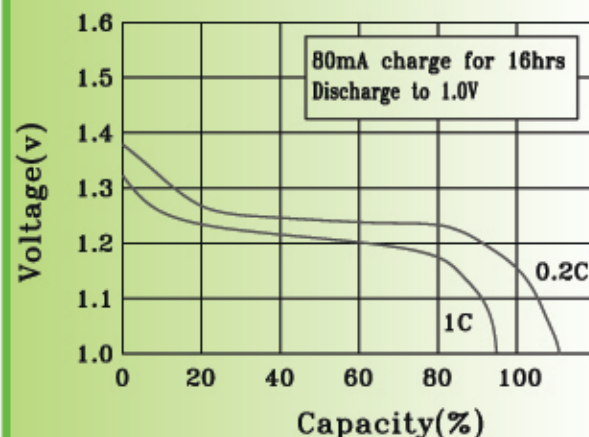

DISCHARGE CHARACTERISTICS AT DIFFERENT TEMPERATURE

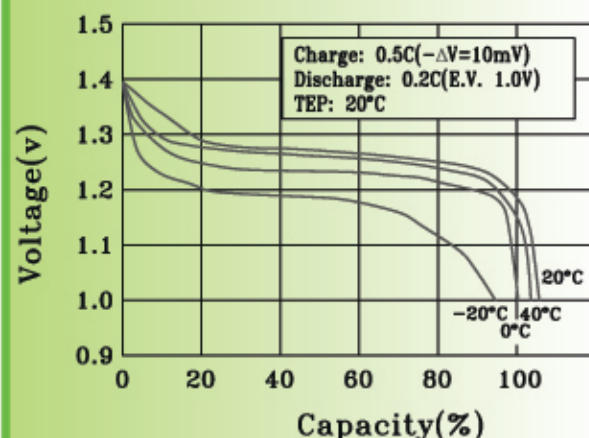

(CELL DIMENSIONS)



(With tube)

1:1