


Ni-MH rechargeable cylindrical battery pack (Data Sheet)


Specification

Nominal Voltage			1.2V
Dimensions	Diameter		10.0±0.2mm
	Height		66.0±0.3mm
	Apx. Weight		18g
0.2C Discharge Capacity	Typical		1050mAh
	Minimum		1000mAh
Typical Internal Impedance			Less than 30mΩ
Charge	Standard		100mA for 16 hrs
	Fast		1000mA for about 75min
Life expectancy			500 cycles
Operating Temperature	Charge	Standard	0°c to 40°c
		Fast	10°c to 40°c
	Discharge		-10°c to 50°c
	Storage	< 1 year	-10°c to 30°c
		< 3 months	-10°c to 40°c


CHARGE CHARACTERISTICS

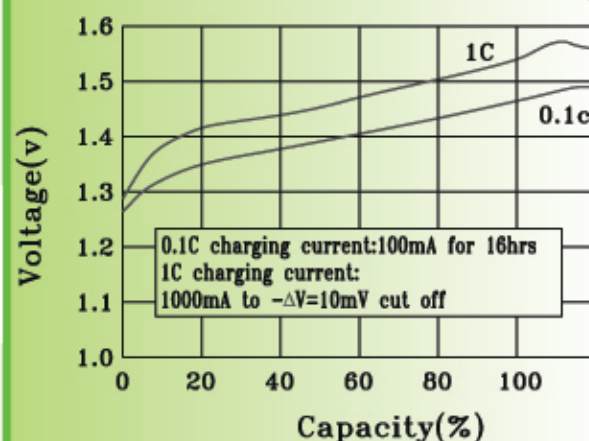


DISCHARGE CHARACTERISTICS

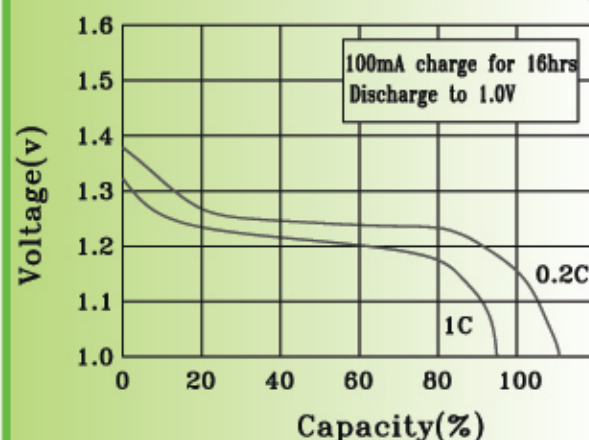

DISCHARGE CHARACTERISTICS AT DIFFERENT TEMPERATURE

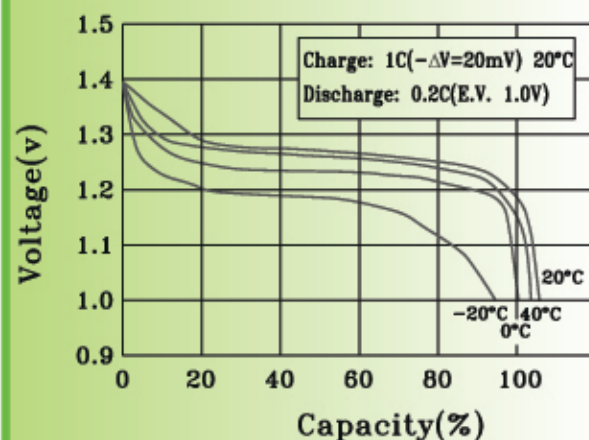

(CELL DIMENSIONS)

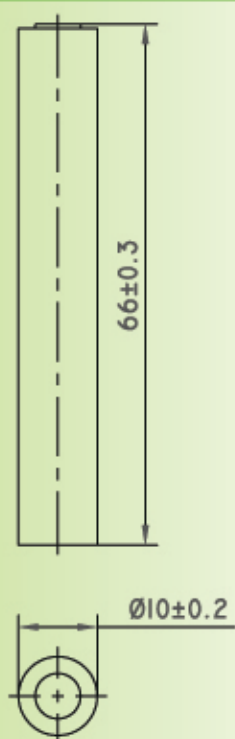

(With tube)

1:1