
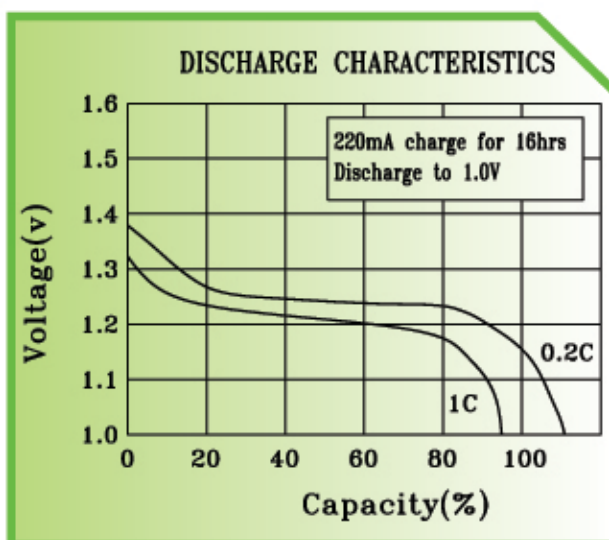



Ni-MH rechargeable cylindrical battery pack (Data Sheet)

Specification

Nominal Voltage		1.2V	
Dimensions	Diameter	32.2±0.2mm	
	Height	61.2±0.3mm	
	Apx. Weight	76g	
0.2C Discharge Capacity	Typical	2250mAh	
	Minimum	2200mAh	
Typical Internal Impedance		Less than 10mΩ	
Charge	Standard	220mA for 16hrs	
	Fast	1100mA for about 150min	
Life expectancy		500 cycles	
Operating Temperature	Charge	Standard	0°c to 40°c
		Fast	10°c to 40°c
	Discharge		-10°c to 50°c
	Storage	< 1 year	-10°c to 30°c
		<3 months	-10°c to 40°c

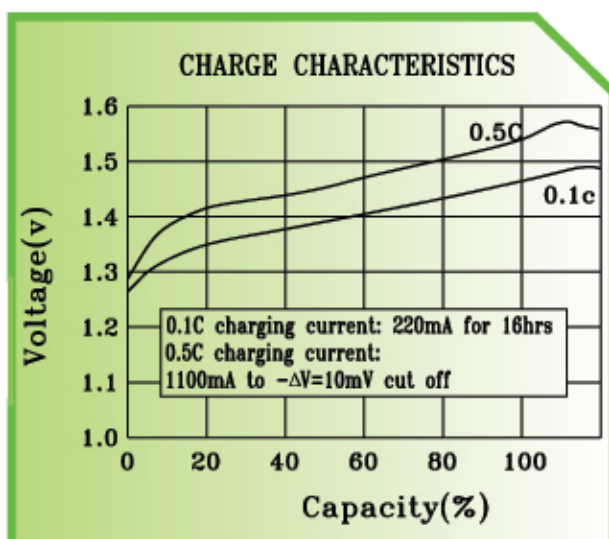

(CELL DIMENSIONS)

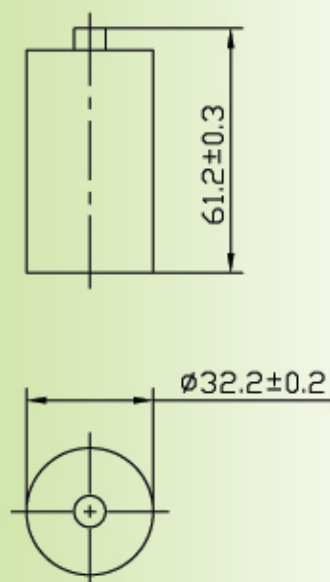

(With tube)

1:2

