


Ni-MH rechargeable cylindrical battery pack (Data Sheet)


Specification

Nominal Voltage			1.2V
Dimensions	Diameter		32.2±0.2mm
	Height		61.2±0.3mm
	Apx. Weight		175g
0.2C Discharge Capacity	Typical		9050mAh
	Minimum		9000mAh
Typical Internal Impedance			Less than 10mΩ
Charge	Standard		900mA for 16hrs
	Fast		4500mA for about 150min
Life expectancy			500 cycles
Operating Temperature	Charge	Standard	0°c to 40°c
		Fast	10°c to 40°c
	Discharge		-10°c to 50°c
	Storage	< 1 year	-10°c to 30°c
		< 3 months	-10°c to 40°c


CHARGE CHARACTERISTICS

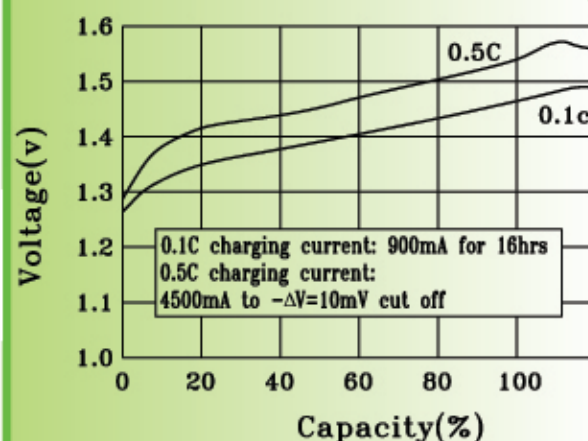


DISCHARGE CHARACTERISTICS

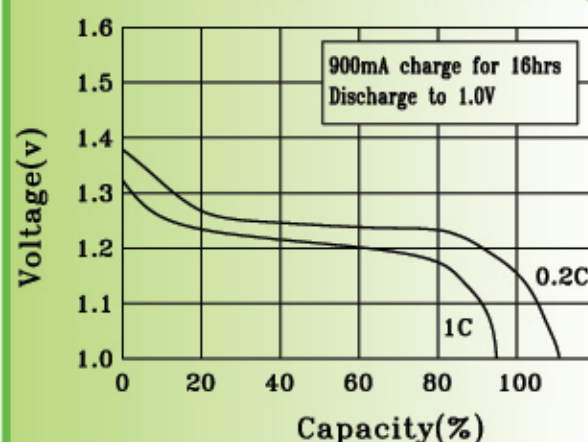

DISCHARGE CHARACTERISTICS AT DIFFERENT TEMPERATURE

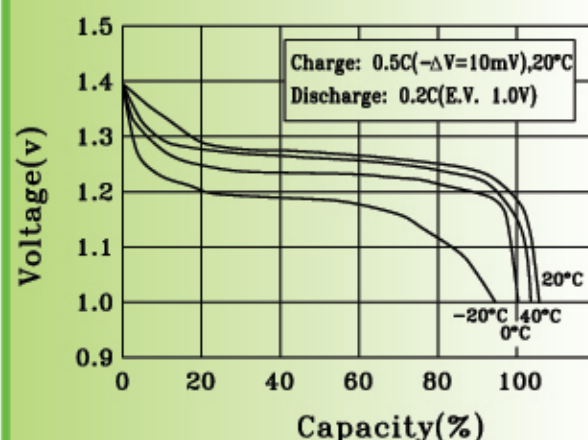

(CELL DIMENSIONS)

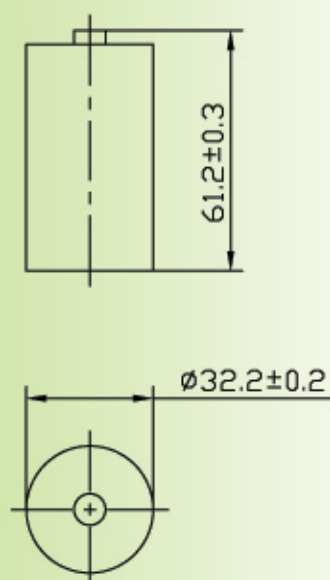

(With tube)

1:2