



Zinc-Silver Oxide/Manganese Dioxide Battery

VER:

DATE:

**1.5V**

Zinc-Silver Oxide/ Manganese Coin type Battery

## **Specification**

**60mAh**

**Model: SR48**

Prepared By/Date	Checked By/Date	Approved By/Date

### **Important Notice**

These data sheets contain information specific to batteries manufactured at the time of its publication.

Content herein do not constitute a warranty.

Copyright @ Xtra-Power Battery .All rights reserved



# Zinc-Silver Oxide/Manganese Dioxide Battery

VER :

DATE :

## PRODUCT SPECIFICATION

**1. Applicability:** This specification is applicable to **SR48** coin type zinc-silver oxide/manganese dioxide battery.

### **SPECIFICATION**

**1. Cross Reference :**

IEC	JAPAN	Ray-O-Vac	U.S.A SWITZERLAND	GERMANY	H.K PRODUCTS
SR48	SR754W	RW48	393	V393	SG5

**2. Chemical System :** Zinc-Silver Oxide/ Manganese Dioxide (Potassium Hydroxide Electrolyte )

**3. Nominal Voltage :** 1.55V

**4. Standard Capacity :** 60mAh ( continuously discharge at 20±2°C under 22k Ω load to 0.9V end-point voltage )

**5. Approximate Weight :** 1.03g

**6. Dimensions & Structure :** Dimensions & structure of the cell are shown in the attached Fig. 1.

**7. Terminal Materials :**  
Negative : Ni plated/Fe/Cu plated or gold plated steel  
Positive : Ni plated steel



## Zinc-Silver Oxide/Manganese Dioxide Battery

VER :

DATE :


**8. Characteristics :** Characteristics of the cell are shown in the following table.

Items	Storage	Characteristics	Conditions
<b>8.1 Electric Characteristics</b>			
Open-Circuit Voltage	Initial	1.560V or higher	DC Voltmeter: The tolerance is $\pm 0.005V$ and the input resistance is $1M \Omega$ or more.
	After 12 months	1.550V or higher	
Closed-Circuit Voltage	Initial	1.550V or higher	DC Voltmeter : Same as above. Load Resistance : $22k \Omega$ , 0.8Sec.
	After 12 months	1.540V or higher	
<b>8.2 Service Output</b>			
Service Life $22k \Omega$	Initial	1000hrs or longer	Discharge Resistance : $22k \Omega$
Continuous Discharge	After 12 months	990hrs or longer	End-Point Voltage : 0.9V
<b>8.3 Electrolyte Leakage Proof Characteristics</b>			
Electrolyte leakage on overdischarge	There are no bulging or deformation of cells in excess of maximum dimensions shown in attached Fig. 1 by 0.2mm or more. There are no visible electrolyte leakage.		Temperature : $20 \pm 2^\circ C$ Humidity : $(65 \pm 20)\%RH$ Load Resistance : $22k \Omega$ Overdischarge Time : 48hrs (discharge after having reached specified end-point voltage)

**9. Discharge Curve :**

Load Resistance : 22k  $\Omega$

End-Point Voltage: 0.9V

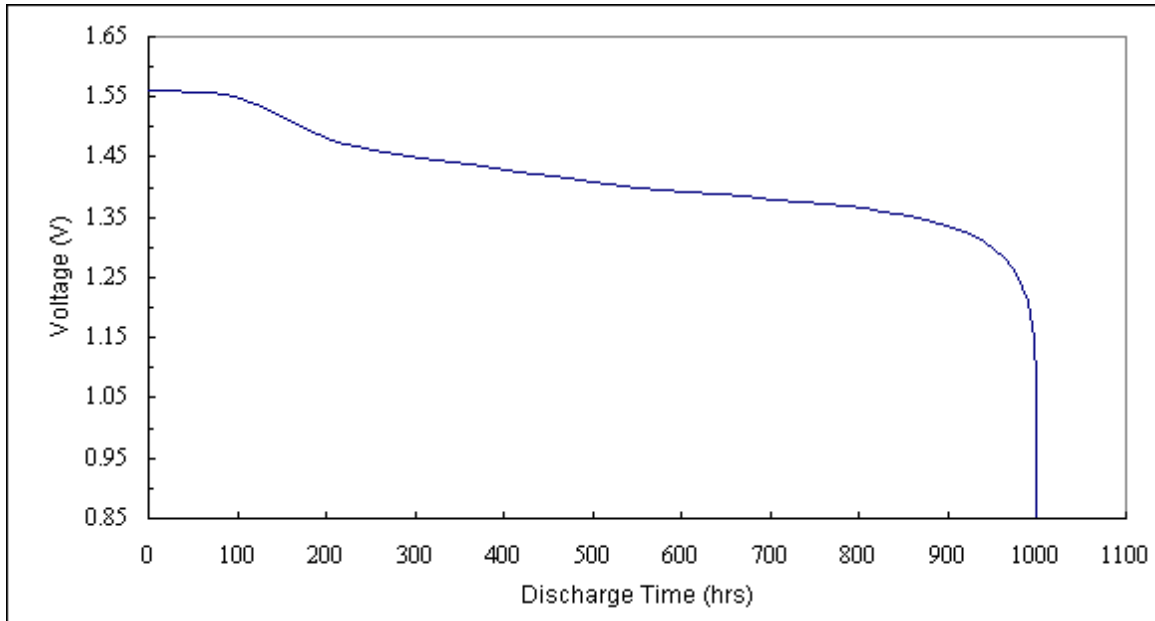

**10. Markings on Product :**

- (1) Battery Type : SR754
- (2) Brand :
- (3) Polarity : "+" at the bottom ( "--" not indicated )
- (4) Other specified markings

**11. Caution for Use :**


- (1) Since the button cell is not manufactured for recharging, there are risks of electrolyte leakage or causing damage to the device if the cell is charged.
- (2) The button cell shall be installed with its "+" and "--" sign according to the instruction shown on the applied device.
- (3) Short-circuiting, heating, disposing of in fire, or disassembling the button cell shall be prohibited.

**12. Warranty :**

12 months shelf life after delivery.

SR754 DIMENSIONS & STRUCTURE

Dimensions ( in mm ) :

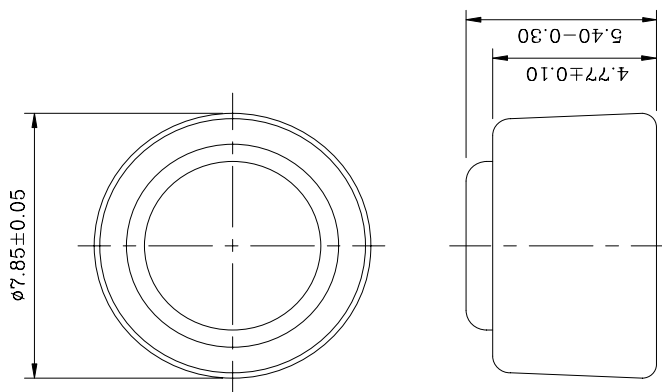

Structure :

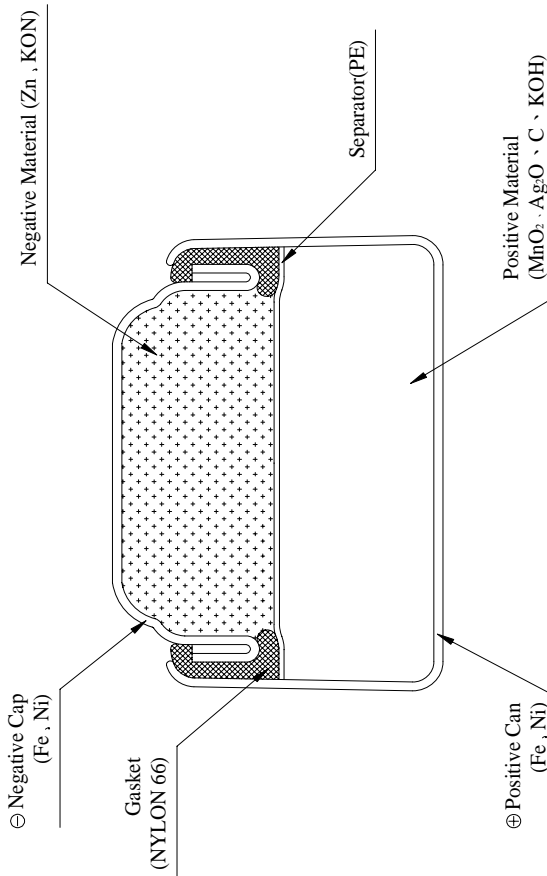


Fig. 1